

VS3V THREE WAYS BALL VALVE 303030




303030


3 WAYS ball valves, 4 seals, 'T' hole
Steering control: ISO5211 flange for pneumatic actuator
Connection: clamp ISO 2852 / DIN 32676
Bore through: Total
Material: AISI 304 - 316
Size: from 1/2" to 4"
Seals: P.T.F.E. virgin
Operating Temperature: -20°C +160°C
Surface Finish: Glossy

On request:


Antistatic device ATEX II 2 G-D T4 (Directive 94/9/EC)
• KF connection
• Seals made of: P.T.F.E. with glass or P.T.F.E. with carbographe High-molecular weight polyethylene

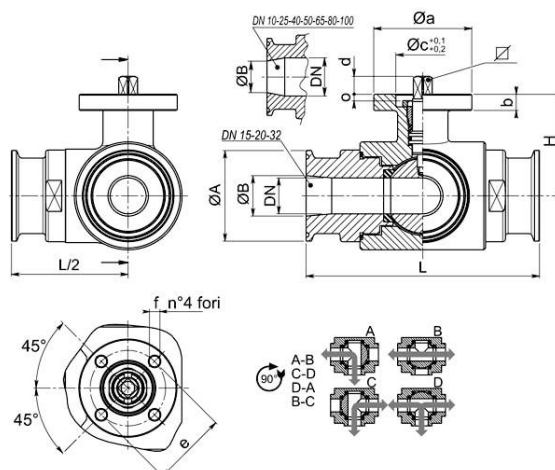

CLAMP	DN	L	Ø A	Ø B	H	PN	Kg	ISO-DIN	Ø a	B	Ø c x o	QU.	d	e	f	n°4 viti	Nm *	CODICE AISI 304L	CODICE AISI 316L
1/2"	10	108	25	9,7	46,5	40	1,06	F.03	46	9	25x3	9	8	36	6	M5x16	10		303030 61210
1/2"	10	108	25	9,7	46,5	40	1,10	F.04	54	9	30x3	11	10	42	6	M5x16	10		303030 6121F
3/4"	15	118	25	16	49	40	1,31	F.03	46	9	25x3	9	8	36	6	M5x16	12		303030 61810
3/4"	15	118	25	16	49	40	1,35	F.04	54	9	30x3	11	10	42	6	M5x16	12		303030 6181F
DIN 20	15	118	34	20	49	40	-	F.03	46	9	25x3	9	8	36	6	M5x16	12		303030 61910
DIN 20	15	118	34	20	49	40	-	F.04	54	9	30x3	11	10	42	6	M5x16	12		303030 6191F
DIN 20	20	130	50,5	22,2	56,5	40	-	F.04	54	9	30x3	11	10	42	6	M5x16	23		303030 62010
DIN 20	20	130	50,5	22,2	56,5	40	-	F.05	65	9	35x3	14	13	50	7	M6x16	23		303030 6201F
1"	20	130	50,5	22,2	56,5	40	2,43	F.04	54	9	30x3	11	10	42	6	M5x16	23		303030 62410
1"	20	130	50,5	22,2	56,5	40	2,54	F.05	65	9	35x3	14	13	50	7	M6x16	23		303030 6241F
1"	25	140	50,5	22,2	61	40	3,12	F.04	54	9	30x3	11	10	42	6	M5x16	25	303030 42610	303030 62610
1"	25	140	50,5	22,2	61	40	3,23	F.05	65	9	35x3	14	13	50	7	M6x16	25	303030 6261F	303030 6261F
1 1/2"	32	156	50,5	34,8	81,5	40	4,87	F.05	65	12	35x4	14	13	50	7	M6x20	33	303030 63210	303030 63210
1 1/2"	32	156	50,5	34,8	81,5	40	5,03	F.07	90	12	55x4	17	15	70	9	M8x20	33	303030 4321F	303030 6321F
1 1/2"	40	172	50,5	34,8	89	40	7,25	F.05	65	12	35x4	14	13	50	7	M6x20	40	303030 43410	303030 63410
1 1/2"	40	172	50,5	34,8	89	40	7,42	F.07	90	12	55x4	17	15	70	9	M8x20	40	303030 4341F	303030 6341F
2"	50	182	64	47,5	91,5	25	8,65	F.07	90	12	55x4	17	15	70	9	M8x20	50	303030 43810	303030 63810
2"	50	182	64	47,5	91,5	25	8,82	F.10	125	12	70x4	22	18	102	11	M10x25	50	303030 4381F	303030 6381F
2 1/2"	65	196	77,5	60,2	101,5	25	10,65	F.07	90	12	55x4	17	15	70	9	M8x20	60	303030 44410	303030 64410
2 1/2"	65	196	77,5	60,2	101,5	25	11,15	F.10	125	12	70x4	22	18	102	11	M10x25	60	303030 4441F	303030 6441F
3"	80	256	91	72,6	116	16	21,85	F.07	90	12	55x4	17	15	70	9	M8x20	110	303030 44810	303030 64810
3"	80	256	91	72,6	116	16	22,35	F.10	125	12	70x4	22	18	102	11	M10x25	110	303030 4481F	303030 6481F
4"	100	286	119	97,6	131	16	33,80	F.07	90	12	55x4	17	15	70	9	M8x20	130	303030 45410	303030 65410
4"	100	286	119	97,6	131	16	34,28	F.10	125	12	70x4	22	18	102	11	M10x25	130	303030 4541F	303030 6541F

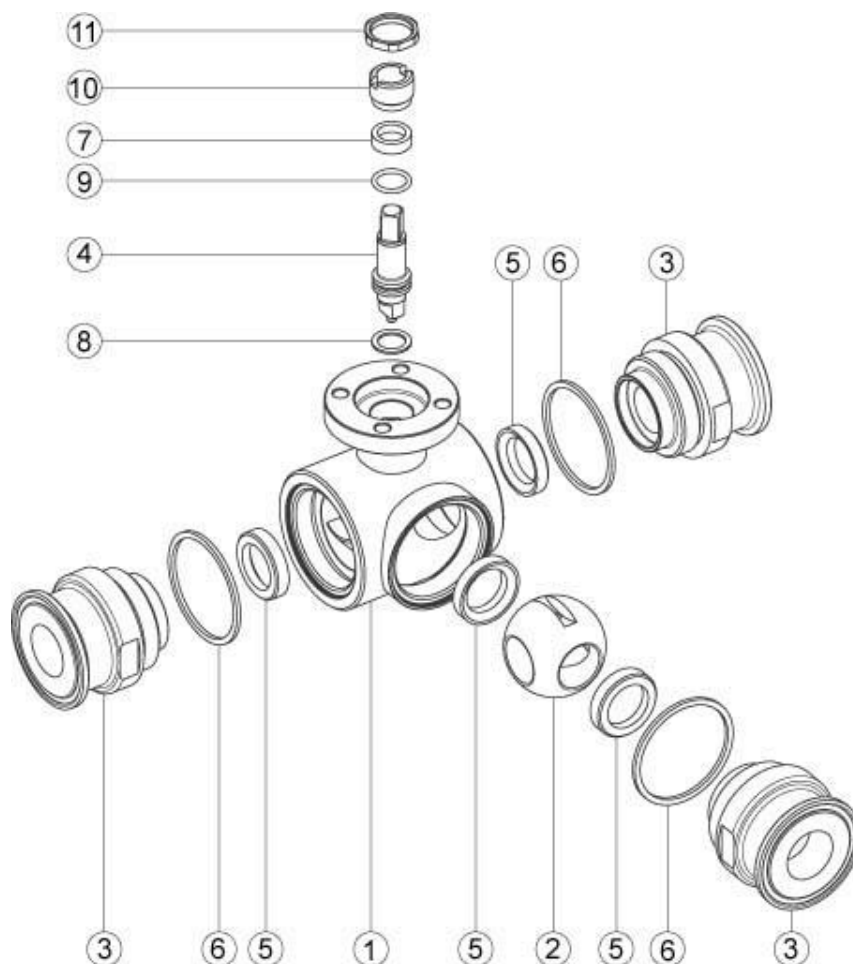

POS.	DENOMINAZIONE	P.ZI	MAT.
10	Ghiera di registro	1	AISI 304L (303)
9	OR di tenuta perno	1	FKM
8	Guarnizione perno	1	PTFE
7	Guarnizione perno	1	PTFE
6	Guarnizioni manicotti	3	PTFE
5	Guarnizioni sfera	4	PTFE
4	Perno	1	AISI 316L
3	Manicotti	3	AISI 316L
2	Sfera	1	AISI 316L
1	Corpo	1	AISI 316L
11	Controdado	1	AISI 303

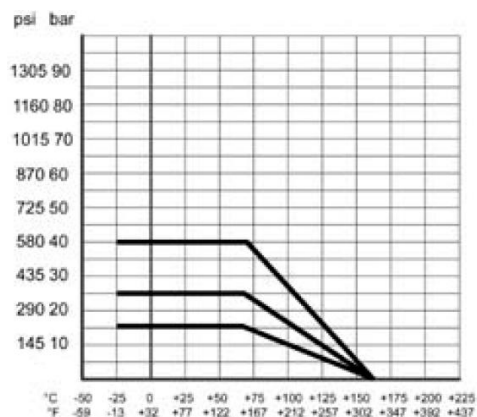

In the interests of development and improvement of the product, we reserve the right to change the specifications without prior notice.