

BSPP Adaptors Female Metric

BSPP Adaptors Female Metric


Adaptors are available as either male or female and are supplied with a BSPP thread. All threaded adaptors are manufactured from solid 316L bar stock. This offers both excellent material properties and guarantees good controllable surface finishes.

The flanged clamping side of the BSPP adaptors are dimensioned and manufactured to 'mate up' directly with corresponding ferrules to BS4825, ISO & DN32676 standards, completing the clean crevice free transition between threaded pipe and the Tri-Clamp union.



Technical information

Sizes	see table
Connections	Tri-Clamp
Material	1.4404 (316L)
Finishes	SF1
Certificates	3.1 - Solid Bar

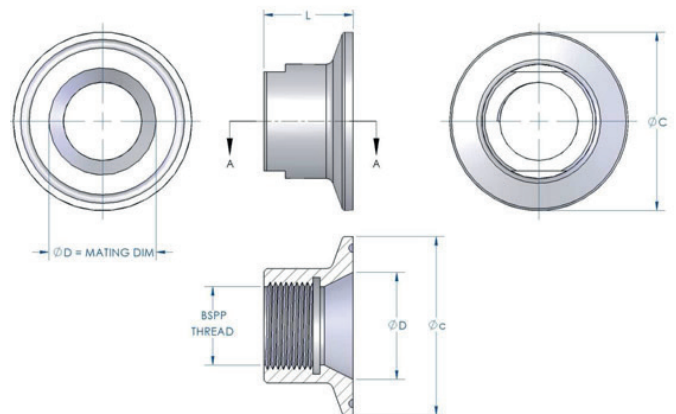

FERRULE	THREAD	Flange $\varnothing C$	Mating $\varnothing D$	Length L^*	Mass (kg)
DN10	1/4"	34.0	10.0	25	0.08
	3/8"	34.0	10.0	25	0.08
	1/2"	34.0	10.0	30	0.07
	3/4"	34.0	10.0	30	0.07
DN15	1/4"	34.0	16.0	30	0.07
	3/8"	34.0	16.0	25	0.07
	1/2"	34.0	16.0	30	0.06
	3/4"	34.0	16.0	30	0.06
DN20	1/4"	34.0	20.0	25	0.07
	3/8"	34.0	20.0	25	0.07
	1/2"	34.0	20.0	30	0.06
	3/4"	34.0	20.0	30	0.06

* These dimensions are indicative, actual sizes may vary.