

AGT SC

DESCRIPTION

The AGT SC is a reverse-acting bursting disc designed specifically for the European pharmaceutical, food and beverage, and biotech industries allowing considerable cost reduction through avoiding the need for compliance with PED-regulations (Pressure Equipment Directive 97/23/EC). The pressure relief device features an instantaneous fully opening pressure relief area for protecting equipment, vessels, systems and people from an overpressure condition exceeding 0.5 barg.

The AGT SC Bursting Disc utilizes Fike's innovative and patented G2® design and manufacturing technology. It has a "line of weakness" on the dome of the disc instead of a score line. There are no stress zones and no tool marks or indentations on the process side of the disc, making this disc with a completely smooth process surface without induced stress zones.

FEATURES

- 316L SST (1.4404) or Hastelloy® C276 (2.4819) materials of construction
- Wide selection of gasket materials
- Excellent cyclic durability
- 95% operating ratio
- Can be operated to full vacuum
- Designed for CIP (Cleaning-In-Place) / SIP (Sterilization-In-Place) processes
- Available sizes DN40 (DIN32676), 2", 3" and 4" (ASME BPE) - Ferrule type and NA-Connect®
- Patented precision scoring on the vent side of the disc dome and indentation-free process surface assures optimum cleanability and improves bursting disc performance / service life
- Visual verification of proper bursting disc orientation within the piping system through attached flow direction tag

BENEFITS

- The standard low pressure allows for a significant cost and time savings benefit in that there is no requirement of Third Party inspection as compliance validation to PED can be avoided
- Meets ASME BPE and USP Class VI criteria, including:
 - Surface finish: 12-25 Ra
 - Solid metal undented surface construction provides cleanability for CIP/SIP applications
 - Fully traceable materials, all components free of polishing compounds, release agents and animal derivatives (FDA, USP VI, EC 1935/2004 and EC 2023/2006 compliant)
- Lowest installation and maintenance costs
- Increased productivity due to extensive cycle life performance

SPECIFICATIONS

| | |
|---|---|
| Type of Disc | AGT SC |
| Sizes | 40 mm (DIN32676) - 2" - 3" - 4" (ASME BPE) |
| Bursting Disc Materials (Outlet Ring 1.4404) ⁽¹⁾ | 316L SST (1.4404) or Hastelloy® C276 (2.4819) |
| Gasket Materials ⁽¹⁾ | Viton® Black EPDM |
| Burst Pressure | 0.400 min to 0.499 max barg at 22°C |
| Maximum Temperature | 150°C |
| Maximum Recommended Operating Pressure | 0.38 barg at 22°C (95% of min burst pressure) |
| Designed for | Gas / vapour service |
| Clamping Type ⁽¹⁾ | Ferrule & Clamp (DIN32676 or ASME BPE), NA-Connect® |

(1) Specify when ordering

INSTALLATION

Available to fit between industry standard sanitary ferrules and NA-Connect® flanges according to DIN32676 (DN40) and ASME BPE (2"/3"/4").


® - Hastelloy is a trademark of Haynes International Inc.; NA-Connect is a trademark of Merck KGaA; and Viton is a trademark of DuPont.



AGT SC

APPROVALS:

- 3A

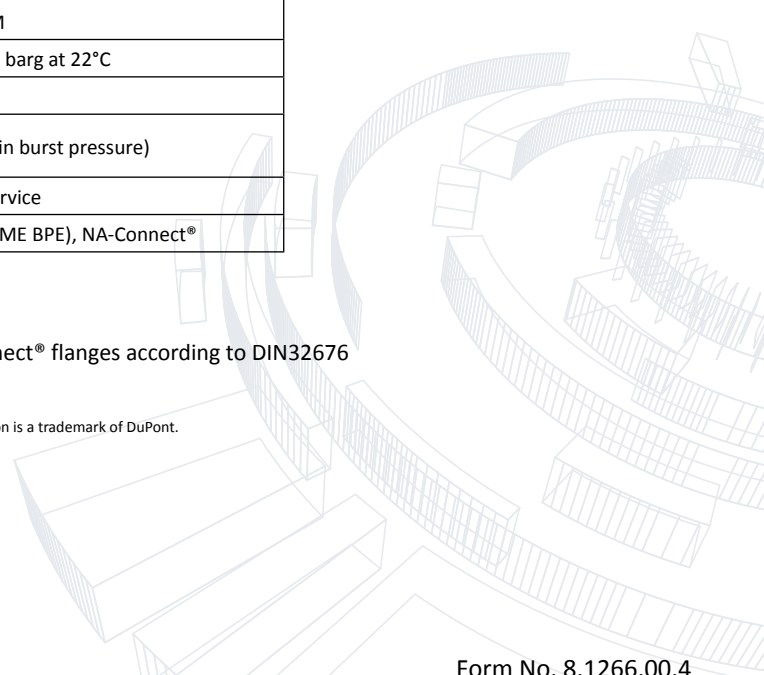

Form No. 8.1266.00.4