


Pneumatically Operated Valve DN 15 - 100 mm (3/4" - 4")



Cf. 1

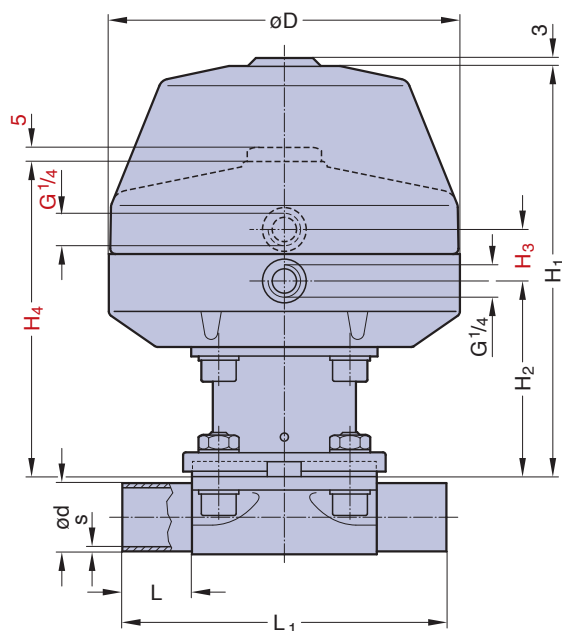

Butt weld ends
MA 25 - 100
Fold out page 21

Features

- Plastic diaphragm actuator with stainless steel distance piece
- Control air connection 90° to flow direction
- Flexible diaphragm suspension
- Encapsulated diaphragm
- CDSA sealing concept, see page 32

Optional

- Available with a wide range of control equipment and accessories see page 118 to 125, also for retrofitting

Technical Data

Control function (Cf.): Pneumatically operated
Fail safe close (NC): Cf. 1
Fail safe open (NO): Cf. 2
Double acting (DA): Cf. 3

Direction

Control connection: At Cf. 1, 2 & 3, 90° to flow direction, standard
Max. working pressure: Unidirectional (delta p = 100%)

Diaphragm	DN 15-50 (1/2"-2")	DN 65-80 (2,5"-3")	DN 100 (4")
EPDM	10 bar (150 psi)	7 bar (100 psi)	6 bar (87 psi)
PTFE	8 bar (115 psi)	6 bar (87 psi)	5 bar (72 psi)

Higher working pressure may be achieved with different actuator. Please consult a SED factory representative for working pressure above the indicated maximum.

Max. working temperature: 160°C (320°F) dependent on application

Control pressure:
Cf. 1 DN 15-50 4,5 - 6 bar (65-87 psi)
Cf. 1 DN 65-80 4,5 - 7 bar (65-100 psi)
Cf. 1 DN 100 5,5 - 7 bar (80-100 psi)
Cf. 2 & 3 DN 15-80 4 - 5,5 bar (60-80 psi)
Cf. 2 & 3 DN 100 5 - 6,5 bar (72-93 psi)

Diaphragm material: EPDM or PTFE
Valve body material: Forged 1.4435/ 316 L ASME/BPE
Investment cast 1.4435/ 316 L
Other alloys

End connection: Butt weld ends see fold out page 21
Clamps and flanges see page 22 and 23
Special ends

Actuators suitable for: Two-Way bodies
Welded configurations
T-bodies
Multiport bodies
Tank bottom bodies

Flow rate: Kv in m³/h (Cv in GPM) see page 9

Diaphragm size: MA see table below

Technical data also valid for multiport valve.

DN (mm)	MA	Dimensions (mm)							Total weight ca. (kg)		Filling volume (NL)	
		L	L ₁	H ₁	H ₂	H ₃	H ₄	D	Investment cast	Forged	NC	NO/DA
15-25	25	25	120	148	71	31	120	130	1,9	2,0	0,15	0,11
32-40	40	25	153	194	95	31	144	161	4,7	4,9	0,26	0,23
50	50	30	173	233	109	31	177	217	7,0	8,0	0,73	0,54
65	80	30	216	314	166	41	275	265	20,0	23,0	2,30	1,87
80	80	30	254	314	166	41	275	265	20,0	23,0	2,30	1,87
100	100	30	305	314	166	41	284	265	29,0	27,0	2,30	2,00

Note: H3 and H4 only for valves with Cf. 2 and Cf. 3 H1 only for valve with Cf. 1

Valve type overview see page 26 and 27.
Ordering key see page 59 to 61.